

# Tiandy



TC-C32RN Spec:I5/E/Y/QX/2.8mm/V4.2

## Dual 2MP Fixed IR Bullet Camera

Spark



### KEY FEATURES

- Dual Lense,Dual Sensor,One IP Two Channel
- Plastic Housing
- Up to 1920x1080@30fps
- S+265/H.265/H.264
- Min. illumination Color: 0.02Lux@F1.6
- Support Realtime Brightness Function
- Surge Protection 4KV
- Smart IR, IR Range: 50m
- Built-in Mic
- Operating Conditions -30°~60°, 0~95% RH
- DC12V,POE(802.3af)
- IP67
- CE, FCC



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com) Tel: +86-22-58596065  
Website: [en.tiandy.com](http://en.tiandy.com) Fax: +86-22-58596048



## SPECIFICATIONS


<b>Camera</b>	
Image Sensor	Dual 1/3" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR
Day&Night	Dual IR Cut Filter with Auto Switch
WDR	DWDR
Angle Adjustment	Pan 0~90°,Tilt 0~350°,Rotation 0~360°
<b>Lens</b>	
Lens Type	Fixed
Focal Length	Dual 2.8mm
Lens Mount	M12
Aperture Range	F1.6,Fixed
Field of View	Horizontal field of view:93.9° Vertical field of view:51.2° Diagonal field of view:108.7°
<b>Illuminator</b>	
IR LEDs	6
IR Distance	Up to 50m
Wavelength	850nm
<b>Compression Standard</b>	
Video Compression	S+ 265/H.264B/H.264M/H.264H
Video Bit Rate	32kbps~4Mbps
Audio Compression	G.711A/G.711U
Audio Sampling Rate	8kHz/16kHz
<b>Image</b>	
Max. Resolution	1920x1080
Main Stream	PAL: 25fps(1920x1080,1280x720,704x576,640x480) NTSC:30fps(1920×1080,1280×720,704×480,640×480)
Sub Stream	PAL:25fps(704x576,704x288,352x288,640x360) NTSC:30fps(704x480,704x240,352x240,640x360)
Third Stream	N/A
BLC	Yes
HLC	Yes
AGC	Yes
3D DNR	Yes
White Balance	Auto/Semi-auto/Manual/Sunny/Natural light/Warm light/Sodium lamp/Incandescent lamp/Locked white balance
ROI	N/A
OSD	16*16/32*32/48*48,adaptable size,Letters Such as Week,Date,Time,Total 1 Regions
Picture Overlay	N/A
Privacy Mask	Yes,4 regions
Defog	Yes

# Tiandy

<b>Feature</b>	
<b>Alarm Trigger</b>	IP Address Conflict, Motion Detection
<b>Network</b>	
<b>ANR</b>	N/A
<b>Protocols</b>	HTTP, TCP/IP, UDP, ICMP, DHCP, DNS, NTP, IPv4, SSH, RTSP
<b>System Compatibility</b>	onvif Profile S/T, CGI, MILSTONE
<b>Remote Connection</b>	2
<b>Client</b>	Easy7
<b>Mobile Client</b>	EasyLive Plus
<b>Web</b>	IE, Firefox, Edge, Safari, Chrome
<b>Interface</b>	
<b>Communication Interface</b>	1 RJ45 10M/ 100M self adaptive Ethernet port
<b>Built-In Mic</b>	Yes
<b>General</b>	
<b>Web Client Language</b>	18 languages English, Russian, Spanish, Korean, Italian, Turkish, Simple Chinese, Traditional Chinese, Thai, French, Polish, Dutch, Hebrew, Arabic, Vietnamese, German, Ukrainian, Portuguese
<b>Operating Conditions</b>	-30°C~60°C, 0~95%RH
<b>Storage Conditions</b>	-30°C~60°C, 0~95%RH
<b>Power Supply</b>	DC12V±25%, POE (IEEE802.3af)
<b>Power Consumption</b>	≤8W
<b>Protection</b>	IP67
<b>Boundary Dimensions</b>	133mm(D)×260mm(H)
<b>Package Dimensions</b>	310(L)140(W)130(H)mm
<b>GrossWeight</b>	0.87kg
<b>NetWeight</b>	0.67kg

# Tiandy

## DIMENSIONS

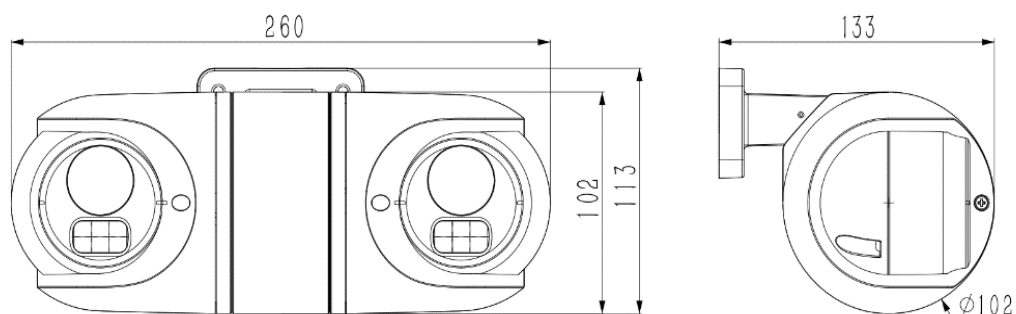

\* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.