

Tiandy



TC-C32WP

Spec: I5W/E/Y/(M)/2.8mm(4mm)/V4.2

2MP Fixed Color Maker Bullet Camera

Lite Series



KEY FEATURES

- Default: Plastic, M: Metal Housing
- Up to 1920x1080@30fps
- S+265/H.265/H.264
- Min. illumination Color: 0.0008Lux@F1.6
- 2 Warm lights, 15~20m
- Smart IR, IR Range: 50m
- Support Realtime Brightness Function
- Support tripwire and perimeter
- Built-in Mic, SD Card Slot, Reset Button
- Operating Conditions -35°C~60°C, 0~95%RH
- POE, IP67
- Surge Protection 4KV
- CE, FCC



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com

Tel: +86-22-58596178

Website: en.tiandy.com

Fax: +86-22-58596048



SPECIFICATIONS

| Camera | |
|-----------------------|--|
| Image Sensor | 1/2.8" CMOS |
| Signal System | PAL/NTSC |
| Min. Illumination | Color: 0.0008Lux@ (F1.6, AGC ON), 0Lux with LED on |
| Shutter Time | 1s to 1/100,000s |
| Day & Night | Dual IR Cut Filter with Auto Switch |
| Wide Dynamic Range | 120dB |
| Angle Adjustment | Bracket, pan 0~360°, tilt 0~75°, roate 0~360° |
| Lens | |
| Lens Type | Fixed |
| Focus | 2.8mm/4mm |
| Lens Mount | M12 |
| Aperture | F1.6, Fixed |
| FOV | Horizontal field of view: 100.6° (2.8mm)/83.3° (4mm) |
| Illuminator | |
| IR LEDs | 2 |
| IR Range | 50 |
| Wavelength | 850nm |
| White LEDs/Warmlights | 2 |
| Compression Standard | |
| Video Compression | S+265/H.265/H.264 |
| Video Bit Rate | 32Kbps~6Mbps |
| Audio Compression | G.711A/G.711U/ADPCM_D |
| Audio Bit Rate | 8K~48Kbps |
| Image | |
| Max. Resolution | 1920x1080 |
| Main Stream | PAL: 25fps (1920x1080, 1280x720, 704x576, 640x480) NTSC: 30fps (1920x1080,1280x720, 704x480, 640x480) |
| Sub Stream | PAL: 25fps (704x576, 704x288, 640x360, 352x288) NTSC: 30fps (704x480, 704x240, 640x360, 352x240) |
| Third Stream | N/A |
| Image Setting | Saturation, brightness, contrast, sharpness, adjustable by client software or web browser |
| Image Enhancement | BLC/3D DNR/HLC |
| ROI | 8 |
| OSD | 16x16, 32x32, 48x48, adaptable size, Letters Such as Week, Date, Time, Total 3 Regions |
| Picture Overlay | N/A |
| Privacy Mask | Yes, 4 regions |
| Smart Defog | Yes |
| Feature | |
| Alarm Trigger | Motion Detection, Mask Alarm, IP Address Conflict |
| Video Analytics | Tripwire, Perimeter |
| Early Warning(EW) | N/A |



| Network | |
|-------------------------|---|
| ANR | N/A |
| Protocols | TCP/IP, HTTP, FTP, DHCP, DNS, DDNS, IPV4, NTP, UDP, Telnet, ICMP, RTP, RTSP, UPnP |
| System Compatibility | ONVIF (PROFILE S/T/G), SDK, P2P(Mutually exclusive with Profile G) |
| Remote Connection | ≤7 |
| Client | Easy7, EasyLive |
| Web Version | Web6 |
| Interface | |
| Communication Interface | 1 RJ45 10M/ 100M self adaptive Ethernet port |
| Audio I/O | Mic in |
| Alarm I/O | N/A |
| Reset Button | Yes |
| On-board storage | Built-in MicroSD card slot, up to 512 GB |
| General | |
| Firmware Version | - |
| Web Client Language | 17 languages Chinese Simplified/English/Chinese Traditional/Spanish/Italian/Korean/Turkish/Russian/Thai Chinese/Polish/French/Dutch/Hebrew/Vietnamese/Arabic/German/Ukrainian |
| Operating Conditions | -35°C ~ 60°C, 0 ~ 95% RH |
| Power Supply | DC 12V±25%, PoE(IEEE802.3af) |
| Power Consumption | MAX: 6W (12V) MAX: 8W (PoE) |
| Protection | IP67, Lightning protection, surge protection and voltage transient protection meets EN 55035:2017 |
| Heater | N/A |
| Dimensions | 160.8×68×74.5mm (6.33×2.68×2.93inch) |
| Weight | Metal+Plastic: 0.3Kg (0.66lb) Metal: 0.47Kg (1.04lb) |

* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

AVAILABLE MODEL


TC-C32WP Spec: I5W/E/Y/2.8mm/V4.2

TC-C32WP Spec: I5W/E/Y/4mm/V4.2


TC-C32WP Spec: I5W/E/Y/M/2.8mm/V4.2

TC-C32WP Spec: I5W/E/Y/M/4mm/V4.2

DIMENSIONS (Unit: mm)

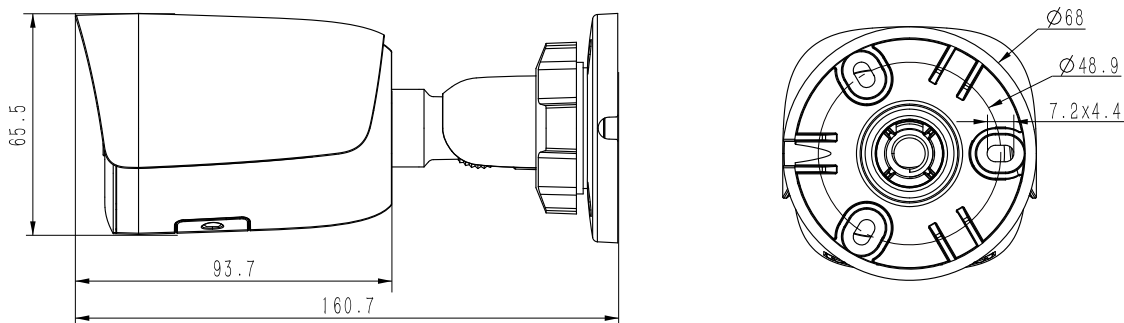

ACCESSORIES



A35
CORNER MOUNT



TC-P54BM SPEC: V5
JUNCTION BOX



A36
POLE MOUNT

DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596178
Fax: +86-22-58596048