

Tiandy



TC-C34QN Spec: I3/E/Y/2.8mm(4mm)/V5.0 4MP Fixed Bullet Camera

Spark



KEY FEATURES

- Metal+Plastic Housing
- Up to 2560x1440@20fps
- S+265/H.265/H.264
- Min. illumination Color: 0.02Lux@F2.0
- Smart IR, IR Range: 30m
- Built-in Mic
- Operating Conditions -30°~60°, 0~95% RH
- POE, IP67
- Support Realtime Brightness Function
- CE, FCC
- Surge Protection 4KV



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048



SPECIFICATIONS

Camera	
Image Sensor	1/3" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color: 0.02Lux@ (F1.6, AGC ON), B/W: 0Lux with IR
Shutter Time	1s to 1/100,000s
Day & Night	Dual IR Cut Filter with Auto Switch
Wide Dynamic Range	Digital WDR
Angle Adjustment	Bracket, pan: 0° to 360°, tilt: 0° to 80°, rotate: 0° to 360°
Lens	
Lens Type	Fixed
Focus	2.8mm/4mm
Lens Mount	M12
Aperture	F1.6, Fixed
FOV	Horizontal field of view: 92.8°(2.8mm)77.6°(4mm) Vertical field of view: 52.2°(2.8mm)44.1°(4mm) Diagonal field of view: 104.8°(2.8mm)89.8°(4mm)
Illuminator	
IR LEDs	2
IR Range	Up to 30 m
Wavelength	850nm
White LEDs/Warmlights	N/A
Range	N/A
Compression Standard	
Video Compression	S+265/H.265/H.264
Video Bit Rate	32 Kbps-6Mbps
Audio Compression	G.711A/G.711U
Audio Bit Rate	8KHz
Image	
Max. Resolution	2560x1440
Main Stream	PAL: 20fps(2560x1440,2304x1296,1920x1080,1280x720) NTSC:20fps(2560x1440,2304x1296,1920x1080,1280x720)
Sub Stream	PAL:20fps(704x576,704x288,352x288,640x360) NTSC:20fps(704x480,704x240,352x240,640x360)
Third Stream	N/A
Image Setting	Saturation, brightness, contrast, sharpness, adjustable by client software or web browser
Image Enhancement	BLC/3D DNR/HLC
ROI	N/A
OSD	16×16, 32×32, 48×48, 64×64,adaptable size, Letters Such as Week, Date, Time, Total 1 Regions
Picture Overlay	N/A
Privace Mask	Yes, 4 regions
Smart Defog	N/A

Tiandy

Feature	
Alarm Trigger	Motion Detection,IP Address Conflict
Video Analytics	N/A
Early Warning(EW)	N/A
Network	
ANR	N/A
Protocols	HTTP,TCP/IP,UDP,ICMP,DHCP,DNS,NTP,IPv4,RTSP,Telnet
System Compatibility	ONVIF (PROFILE S/T), SDK, CGI
Remote Connection	≤2
Client	Easy7, EasyLive Plus
Web Version	Web6
Interface	
Communication Interface	1 RJ45 10M/ 100M self adaptive Ethernet port
Audio I/O	Mic in
Alarm I/O	N/A
Speaker	N/A
Reset Button	N/A
On-board storage	N/A
General	
Web Client Language	12 languages English, Arabic, Italian, Spanish, Japanese, Vietnamese, Thai, Turkish, Russian, Polish, Portuguese, French
Operating Conditions	-30°C~60°C, 0~95% RH
Power Supply	PoE (IEEE802.3af)
Power Consumption	MAX: 6W(POE)
Protection	IP67
Heater	N/A
Dimensions	66mm(D)×164mm(H)
Net Weight	0.22kg
Dimensions of single packing case	175×85x85mm
Gross Weight	0.3kg
Volume of packing box	36


* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

AVAILABLE MODEL

TC-C34QN SPEC: I3/E/Y/2.8MM(4MM)/V5.0

Tiandy

DIMENSIONS (Unit: mm)

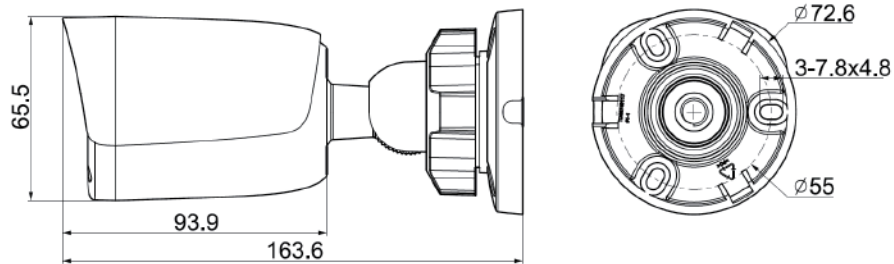

DISTRIBUTED BY



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048