



### Overview

- 2MP (1920\*1080)
- WDR52dB
- 2.8mm Lens
- H.265
- IR, IP67, IK10 Rated







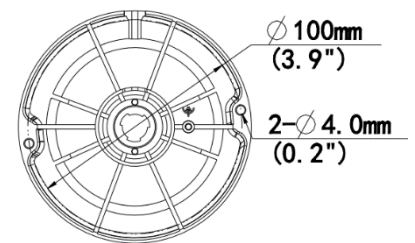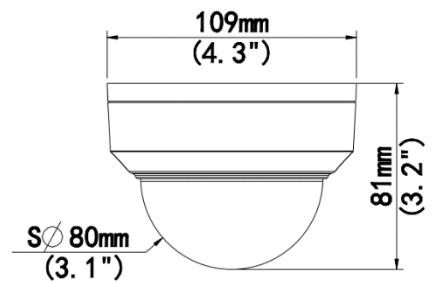












### Technical Specifications

Device	
Image Sensor:	1 / 2.8" Progressive Scan CMOS
Min Illumination:	Color: 0.01Lux (F2.0, AGC ON)   0Lux with IR
Shutter Time:	Auto/Manual, 1 ~ 1/100000s
Lens:	2.8mm@F2.0
WDR:	52 dB
Angle of View:	H: 106.7°, V: 57.1°
Angle Adjustment:	Pan: 3° ~ 360°   Tilt: 0° ~ 75°
Day & Night:	IR-Cut Filter with Auto Switch (ICR)
IR Range:	Up to 30m (98ft) IR range
Compression Standard	
Video Compression:	H.265, H.264
Video Bit Rate:	128 Kbps~6 Mbps
Two Stream:	Yes
Analytics:	Motion Detection
Image	
Max. Image Resolution:	1920 x 1080
Frame Rate:	30fps (1920 x 1080)
ROI Codec:	Up to 8 areas
Image Setting:	White Balance, Digital Noise Reduction, Smart IR, Flip, HLC, BLC



## Technical Specifications

Network							
Protocols:	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, UPnP, HTTP						
Interface							
Communication Interface:	10M/100M Base-TX Ethernet						
General							
Safety	CE, IEC62368-1						
EMC	FCC Part 15, EN 55032:2015+A11:2020, EN 55035: 2017+A11:2020,						
Operating Conditions:	Temperature: -30°C~60°C (-22°F~140°F), Humidity: ≤95% RH (Non-Condensing)						
Power Consumption:	Max 5.0 W						
Power Supply:	DC 12V±25%, PoE (IEEE 802.3af)						
Weatherproof Rating:	IP67						
Vandal Resistant:	IK10						
Dimensions:	Φ109 x 81mm (Ø4.3" x 3.2")						
Net Weight:	0.35kg (0.77lb)						
Software:	No license required for use with Video Insight Software						
Accessories	<table border="0"> <tr> <td style="text-align: center;">M-JB-MINI </td> <td style="text-align: center;">M-WM-JB-MINI </td> <td style="text-align: center;">M-PM </td> </tr> <tr> <td style="text-align: center;">M-INC </td> <td style="text-align: center;">M-NPT34 </td> <td style="text-align: center;">M-Pendant-Ex </td> </tr> </table>	M-JB-MINI 	M-WM-JB-MINI 	M-PM 	M-INC 	M-NPT34 	M-Pendant-Ex 
M-JB-MINI 	M-WM-JB-MINI 	M-PM 					
M-INC 	M-NPT34 	M-Pendant-Ex 